

# BRCS120N03YAQ

Rev.B Jun.-2023

DATA SHEET

## 描述 / Descriptions

PDFN3×3-8L 塑封封装双 N 沟道 MOS 场效应管。

Double N-CHANNEL MOSFET in a PDFN3×3-8L Plastic Package.

## 特征 / Features

$V_{DS} (V) = 30V$

$I_D = 24A (V_{GS} = \pm 20V)$

$R_{DS(ON)}@10V \leq 14mR (Typ. 12mR)$

符合 AEC-Q101 标准高可靠性要求，无卤产品。


Qualified to AEC-Q101 Standards for High Reliability, HF Product.

## 用途 / Applications


用作一般的开关和相位控制，满足汽车应用的严格要求。

Intended for use in general purpose switching and phase control applications, Meet the stringent requirements of automotive applications.

## 内部等效电路 / Equivalent Circuit



## 引脚排列 / Pinning

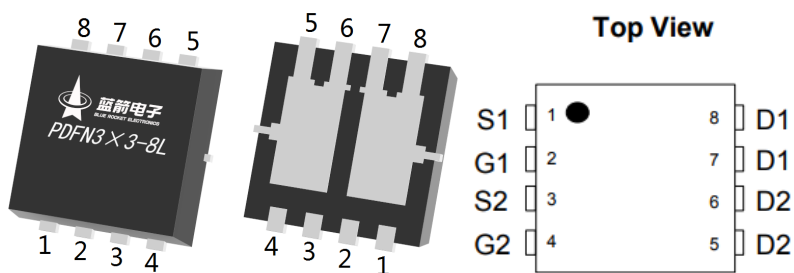

## 印章代码 / Marking

见印章说明。 See Marking Instructions.

**极限参数 / Absolute Maximum Ratings(Ta=25°C)**

参数 Parameter	符号 Symbol	数值 Rating	单位 Unit
Drain-Source Voltage	$V_{DSS}$	30	V
Drain Current	$I_D(T_C=25^\circ\text{C})$	24	A
Drain Current - Pulsed	$I_{DM}$	55	A
Gate-Source Voltage	$V_{GSS}$	$\pm 20$	V
Single Pulsed Avalanche Energy	$E_{AS}$	199	mJ
Avalanche Current	$I_{AS}$	12.9	A
Power Dissipation	$P_D(T_C=25^\circ\text{C})$	15.5	W
Operating and Storage Temperature Range	$T_J, T_{stg}$	-55 to 150	$^\circ\text{C}$
Junction-to-Ambient	$t \leq 10$	40	$^\circ\text{C/W}$
Junction-to-Ambient	Steady-State		
Junction-to-Case	Steady-State	9	

## 电性能参数 / Electrical Characteristics(Ta=25°C)

参数 Parameter	符号 Symbol	测试条件 Test Conditions		最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Drain-Source Breakdown Voltage	$BV_{DSS}$	$V_{GS}=0V$	$I_D=250\mu A$	30			V
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS}=30V$	$V_{GS}=0V$			1	$\mu A$
Gate-Body Leakage Current Forward	$I_{GSS}$	$V_{GS}=\pm 20V$	$V_{DS}=0V$			$\pm 0.1$	$\mu A$
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$	$I_D=250\mu A$	1.0	1.8	3.0	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V$	$I_D=20A$		12	14	m $\Omega$
		$V_{GS}=4.5V$	$I_D=10A$		23	30	m $\Omega$
Drain-Source Diode Forward Voltage	$V_{SD}$	$V_{GS}=0V$	$I_S=1A$			1.2	V
Input Capacitance	$C_{iss}$	$V_{DS}=25V$ $f=1.0MHz$	$V_{GS}=0V$		666		pF
Output Capacitance	$C_{oss}$				26		
Reverse Transfer Capacitance	$C_{rss}$				63		
Gate resistance	$R_g$	$V_{GS}=0V$ $f=1MHz$	$V_{DS}=0V$		1.7		$\Omega$
Total Gate Charge	$Q_{g(10V)}$	$V_{GS}=10V$ $I_D=8A$	$V_{DS}=15V$		13.6		nC
Total Gate Charge	$Q_{g(4.5V)}$				6.8		
Gate Source Charge	$Q_{gs}$				1.6		
Gate Drain Charge	$Q_{gd}$				3.6		
Turn-On Delay Time	$t_{d(on)}$	$V_{GS}=10V$ $R_L=1.87\Omega$	$V_{DS}=15V$ $R_{GEN}=4.5\Omega$		5		ns
Turn-On Rise Time	$t_r$				3.5		
Turn-Off Delay Time	$t_{d(off)}$				22		
Turn-Off Fall Time	$t_f$				4.5		

电参数曲线图 / Electrical Characteristic Curve

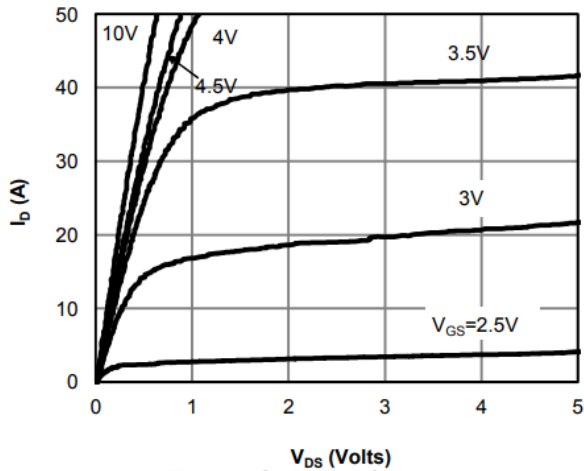


Figure 1: On-Region Characteristics

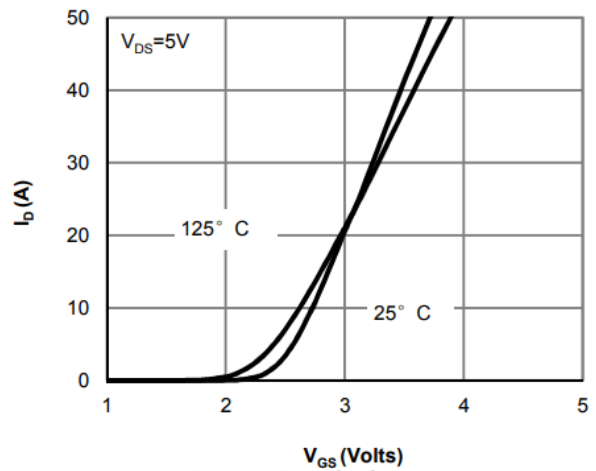


Figure 2: Transfer Characteristics

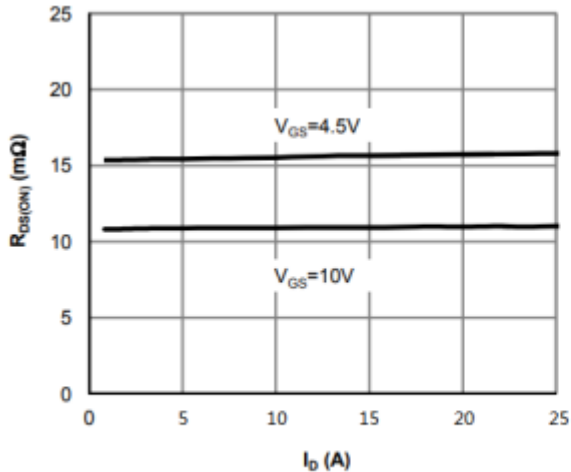


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

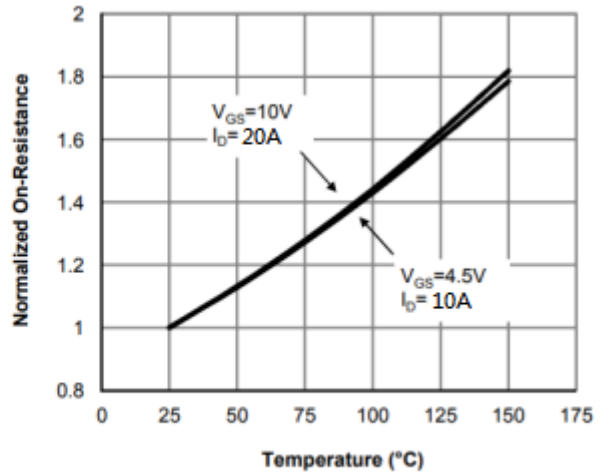


Figure 4: On-Resistance vs. Junction Temperature

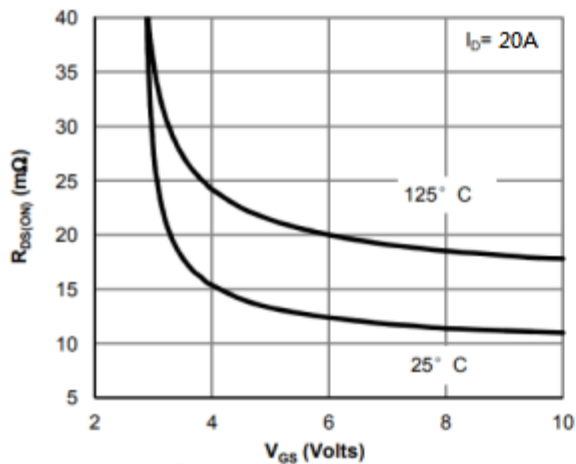


Figure 5: On-Resistance vs. Gate-Source Voltage

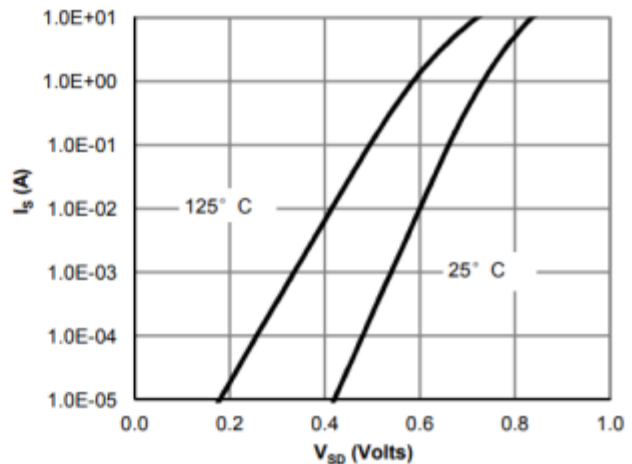


Figure 6: Body-Diode Characteristics

## 电参数曲线图 / Electrical Characteristic Curve

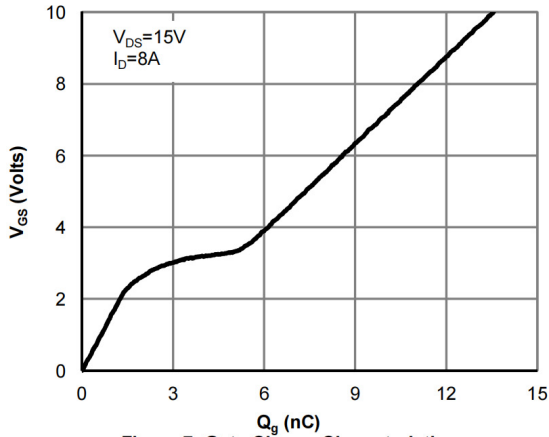


Figure 7: Gate-Charge Characteristics

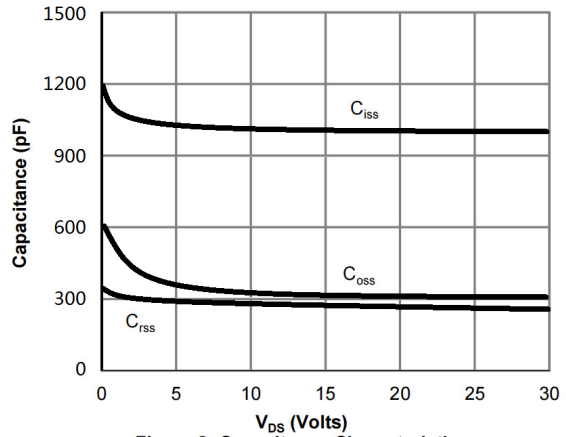


Figure 8: Capacitance Characteristics

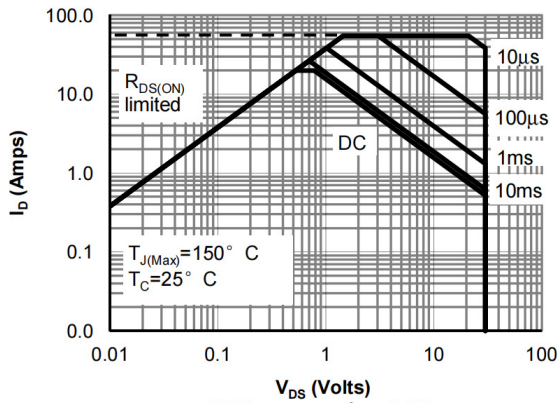


Figure 9: Maximum Forward Biased Safe Operating Area

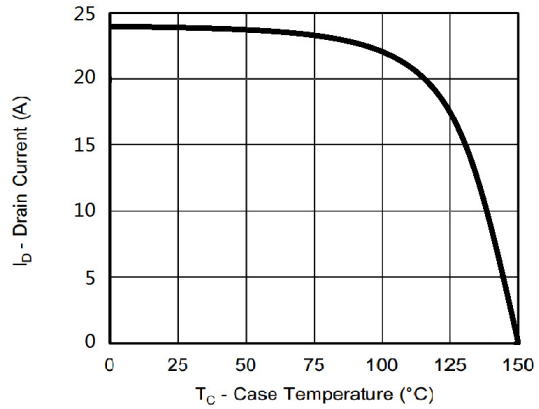


Figure 10: Maximum Continuous Drain Current vs Case Temperature

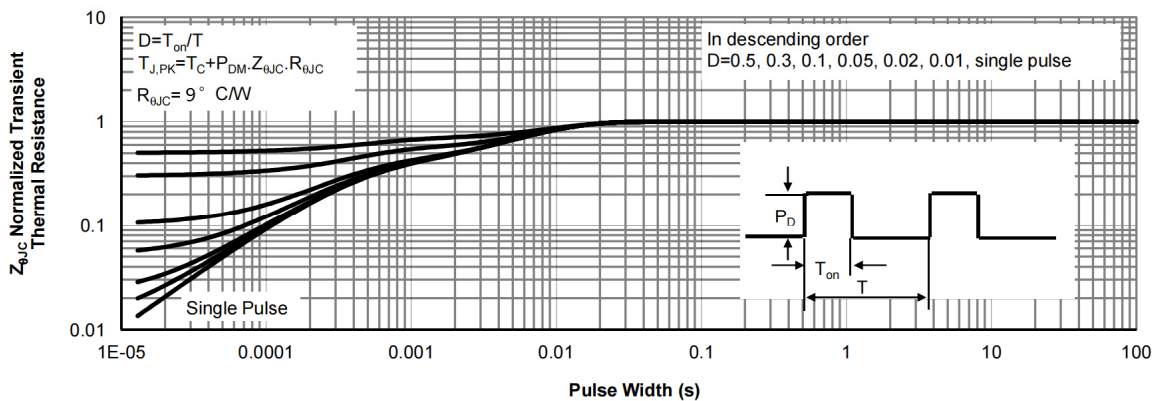


Figure 11: Normalized Maximum Transient Thermal Impedance


# BRCS120N03YAQ

Rev.B Jun.-2023

## 外形尺寸图 / Package Dimensions


PDFN3X3-8L

Unit:mm

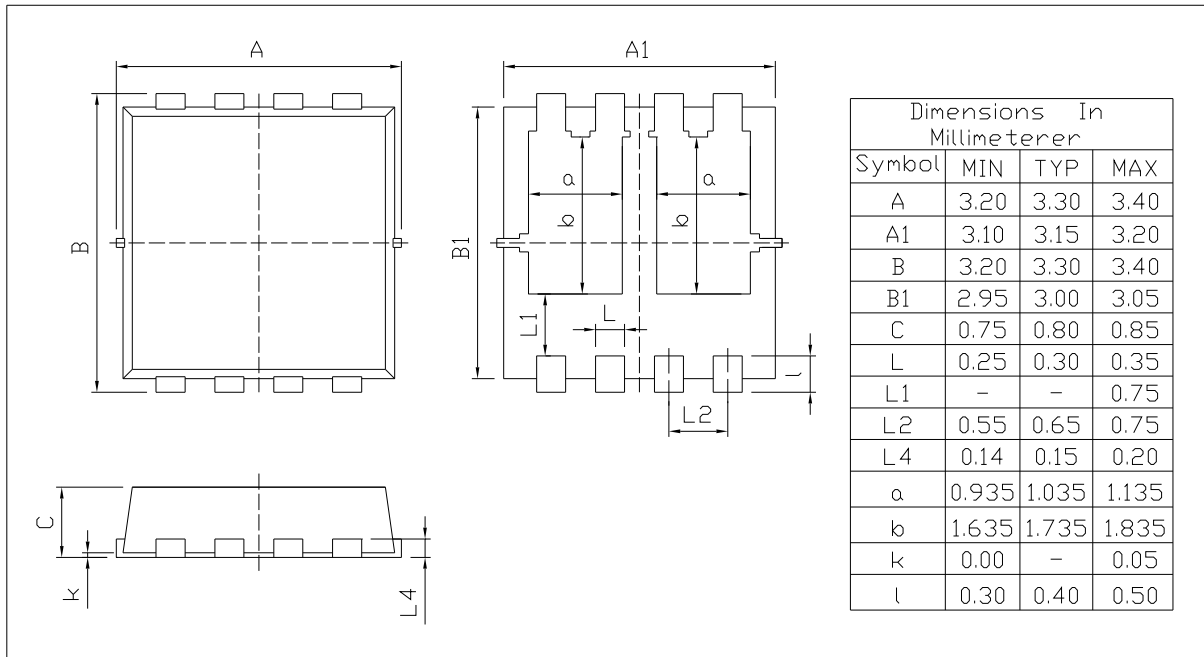

Rev.00 202011

印章说明 / Marking Instructions

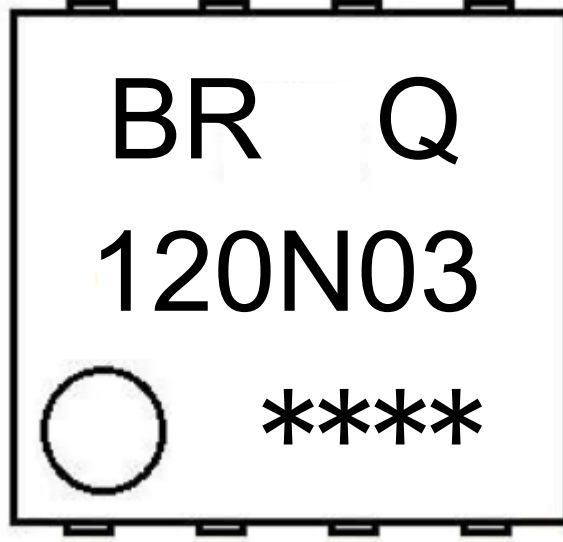

说明：

BR： 为公司代码

Q： 为汽车无卤产品标识

120N03： 为型号代码

\*\*\*\*： 为生产批号代码，随生产批号变化


Note:

BR: Company Code

Q: Automobile halogen-free product Code

120N03: Product Type Code

\*\*\*\*: Lot No. Code, code change with Lot No

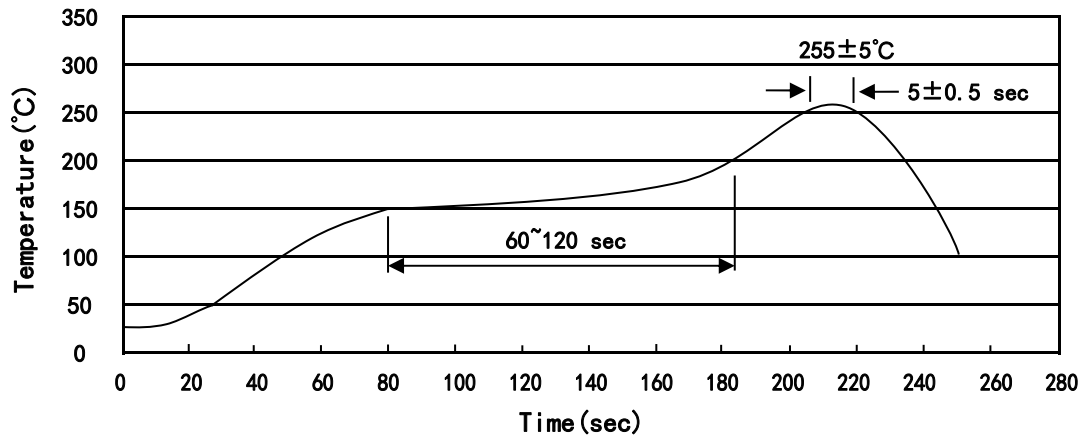**回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)**


说明：

- 1、预热温度 150~200°C，时间 60~120sec;
- 2、峰值温度 255±5°C，时间持续为 5±0.5sec;
- 3、焊接制程冷却速度为 2~10°C/sec.

Note:

- 1.Preheating:150~200°C, Time:60~120sec.
- 2.Peak Temp.:255±5°C, Duration:5±0.5sec.
3. Cooling Speed: 2~10°C/sec.

**耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions**

温度：260±5°C

时间：10±1 sec.

Temp.:260±5°C

Time:10±1 sec

**包装规格 / Packaging SPEC.**

卷盘包装 / REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm <sup>3</sup> )		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
PDFN3×3-8L	5,000	2	10,000	6	60,000	13" ×12	360×360×50	380×335×366

**使用说明 / Notices**